

GES-6P140

GES-6P135 GES-6P145

140 Watt Polycrystalline Photovoltaic Module



Outstanding mechanical load performance enables each panel to withstand wind up to 200 km/h or snow up to 550 kg/m².



In-line Electroluminescence (EL) testing of each panel ensures no micro-cracks or mismatch on cells.



Ammonia Endurance Test(IEC62716) and Salt Mist Test(IEC61701) verified the excellent performance of each panel in harsh or unusual environments.



Aging test under 85 °C and 85 % relative humidity for at least 1500 hours guarantees a low power degradation for 25 years.



No. 201109-E330812



No. Z2 11 05 74112 007



No. SHEMA100300309031XC



Features

- Up to +5W power tolerance of each panel ensuring high ROI
- High cell conversion efficiency up to 17.6 %
- Outstanding electrical performance under high temperature and low-irradiance conditions
- Easy installation and all-weather applications thanks to innovative engineering design

Insurance

All performance and cooperation warranties are ensured with Product Liability and Financial Injury (E&O) Liability Insurance with CHUBB INSURANCE (CHINA) COMPANY LIMITED.

Warranty

GESOLAR guarantees

- Up to +5W power tolerance of each panel
- Workmanship and materials in 10 years
- 90 % minimum power output in 12 years
- 80 % minimum power output in 25 years


Electrical Characteristics

Characteristics	Unit	GES-6P135	GES-6P140	GES-6P145
Maximum Power (Pmax)	W	135	140	145
Power Tolerance	W	(0,+5)	(0,+5)	(0,+5)
Open Circuit Voltage (Voc)	V	22.0	22.2	22.4
Short Circuit Current (Isc)	A	8.00	8.06	8.63
Maximum Power Voltage (Vmp)	V	17.3	17.5	17.7
Maximum Power Current (Imp)	A	7.80	8.00	8.19
Cell Efficiency (ηc)	%	15.9 ~ 16.5	16.5 ~ 17.1	17.1 ~ 17.7
Module Efficiency (ηm)	%	13.5 ~ 14.0	14.0 ~ 14.5	14.5 ~ 15.0
Cell Technology 156mm×156mm, Polycrystalline Silicon; 36pcs(4×9)				
Pmax Temperature Coefficient	%/°C		-0.42	
Voc Temperature Coefficient	%/°C		-0.30	
Isc Temperature Coefficient	%/°C		+0.083	
Maximum System Voltage	VDC		715(TUV);600(UL)	
Maximum Series Fuse Rating	A		13	
Operating Temperature	°C		-40 ~ +85	
NOCT	°C		45±2	


STC: 1000W/m², AM1.5 and 25°C cell temperature; NOCT: Nominal Operating Cell Temperature

I-V Curves

I-V Curves of PV Module GES-6P140 (Cell Temp..25°C)


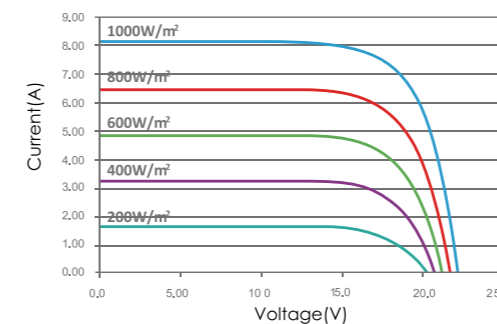


I-V Curves of PV Module GES-6P140 at Different Cell Temperatures(AM1.5,1000W/m²)

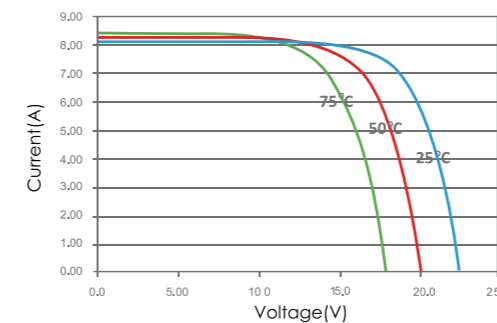

Physical Characteristics

Unit: mm(inch)

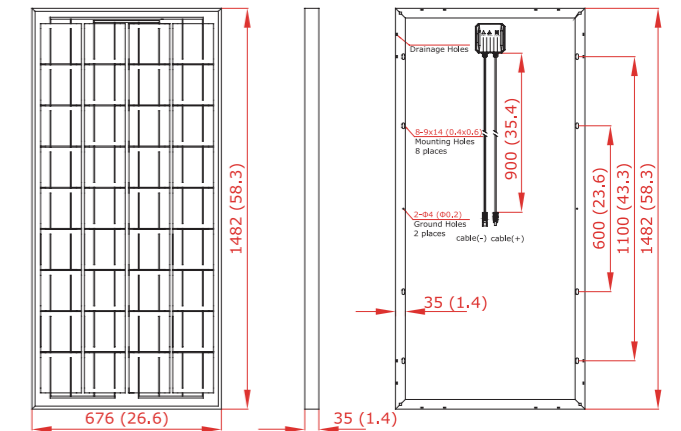

1. Tempered Glass
2. EVA(Ethylene Vinyl Acetate)
3. Solar Cells
4. EVA(Ethylene Vinyl Acetate)
5. Backsheet

Dimension	1482 x 676 x 35 mm (58.3 x 26.6 x 1.4 inch)
Weight	11.5 kg (25.4 lbs.)
Cable Length	900 mm (35.4 inch)
Bypass Diodes	2 pcs
Junction Box	IP65
Front Glass	3.2 mm (0.1 inch) tempered low-iron glass
Frame	Anodized aluminum alloy

* Specifications are subjected to change without further notice.