

dura

COMPACT



DURA-C7 (6,7kW)

Features

- COP up to 5,6
- Operates in air temperature as low as -10°C
- Casing high quality polymer
- Low noise < 59 dBA
- Intuitive, easy to use control panel; crisp colour LCD and only 3 buttons
- ECO-friendly R410A refrigerant
- 15m power-cable included
- Universal union kit included
- Patented NoFrost™ Titanium heat exchanger

Application

- SPA's, Whirlpools
- Ponds
- Indoor and outdoor pools



DURA-C12 (11,7kW)




duratech
heat pumps

Specification	Units	DURA-C7	DURA-C12
Heating capacity	kW	6,7	11,7
A25/W25	BTU/h	22860	39920
Heating capacity	kW	5,2	8,0
A15/W25	BTU/h	17750	27310
COP A25/W25		4,9	4,8
Power input	kW	1,06	2,45
Running current	A	4,6	10,7
Maximum running current	A	5,5	13,0
Power supply	V/Ph/Hz	220-240/1/50	
Operation		Digital control	
Heat Exchanger		Titanium	
Compressor type		Rotary	Rotary
Refrigerant		R410A	R410A
Refrigerant Weight	kg	0,90	1,60
Fan direction		Vertical	Vertical
Fan power input	W	110	110
Fan speed	RPM	1100	1340
Noise	dB(A)	54	59
Water connection	mm	50	50
Nominal water flow	m ³ /h	4-12	5-12
Maximum pool volume (*)	m ³	20	45
Unit net dimensions	l (mm)	480	480
	w (mm)	480	480
	h (mm)	535	750
Unit shipping dimensions	l (mm)	490	490
	w (mm)	490	490
	h (mm)	555	770
Net weight	kg	32	47
Shipping weight	kg	35,5	52

Measuring condition: 65% RH

(*) Maximum volume for an entirely insulated pool, with cover, free from wind and exposed to the sun.!

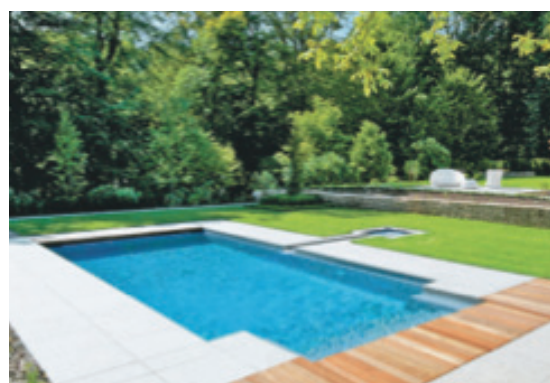

dura
COMPACT

Your distributor

Ibuker Kft. 2800 Tatabánya, Dankó P. u. 17.
tel: +36 34 317-547 fax: +36 34 317-547 mobil: +36 20 982-3021
e-mail: info@goethermia.hu www.goethermia.hu